

Exceed


Exceed takes multi-purpose flooring to an unprecedented level. Its high-tension top layer offers a randomized wood grain aesthetic complete with vinyl embossing, available in three natural hues and suitable for any event. But underneath lies our acclaimed Plaetech™ shock layer, made of reclaimed rubber, engineered in collaboration with strength coaches around the world to deliver ideal force absorption and energy return levels. The dual layers undergo a patented lamination process, which fuses them into a single system that will never separate or weaken, regardless of age or application. For those who seek to combine a classic look and dynamic resilience, we present Exceed.



SOPHISTICATED INNOVATION

Exceed

Please refer to webpage for color options.

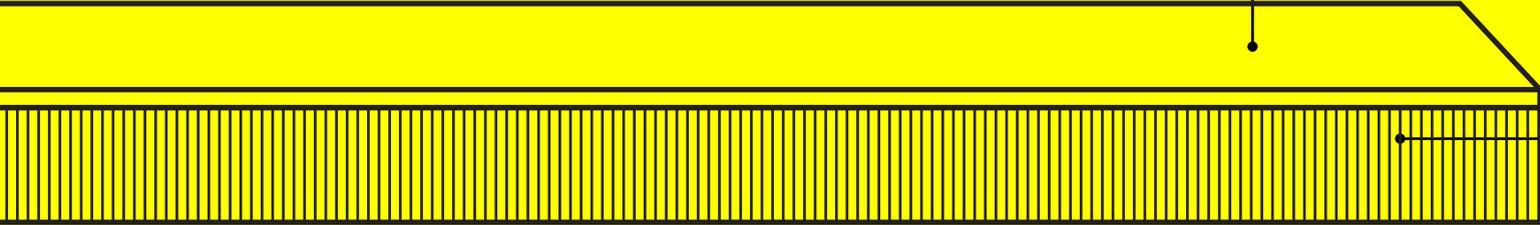

Exceed's high-tension, 2mm vinyl wear layer provides natural wood grain printing and embossing (available in three popular colors) for durable, solid-grip sophistication across numerous applications.

Exceed's patented lamination process creates an unbreakable seal, fusing the system's dual layers into a premier surface that will not separate or weaken, regardless of age or application

Developed alongside respected strength coaches around the world, Exceed's highly aggressive Plaetech™ foundation layer absorbs maximum shock on impact, deadening environmental noise and easing joint stress, while simultaneously delivering ideal energy return levels for safer training and drastically boosted performance.

Materials

Recycled SBR rubber and embossed, coated vinyl

Thickness

7mm, 12mm

Roll Length

7mm: Custom up to 50'

12mm: 30' standard

Weight Per Area

1.23, 1.95 lbs./sq. foot

Roll Width

6'

Spec | Exceed

DESCRIPTION

Materials: Recycled SBR rubber and embossed, coated vinyl

Attributes: Factory-fused, dual-layer rolls: natural wood grain texture printed onto resilient vinyl, which is laminated onto a durable recycled rubber underlayment. Entire system provides long-lasting sophistication, support and dynamically engineered texture for greater coefficient of friction.

APPLICATIONS

Combining resilience and a natural aesthetic, Exceed's characteristics are highlighted in a multi-purpose environment (e.g. cardio rooms, exercise studios, training zones, etc.).

PHYSICAL CHARACTERISTICS

Surface: Embossed, printed "wood" vinyl

Thickness: 7mm, 12mm

Wear Layer: 2mm

Underlayment: 5mm, 10mm

Weight per Area: 1.23, 1.95 lbs./sq. foot

WARRANTY

PLAE warrants that Exceed, when installed using its recommended procedures and adhesives, shall be free of manufacturing defects under normal use for a period of 10 years from the date of its original installation. Please refer to Exceed's warranty for full details.

Roll Length: 7mm: Custom up to 50'

12mm: 30' standard

Roll Width: 6'

Note 1: 2mm wear layer available as isolated product

Note 2: Due to the vinyl fusion process, edge trimming may be required during installation to ensure pattern consistency.





