


# Velocity

Prefab base track

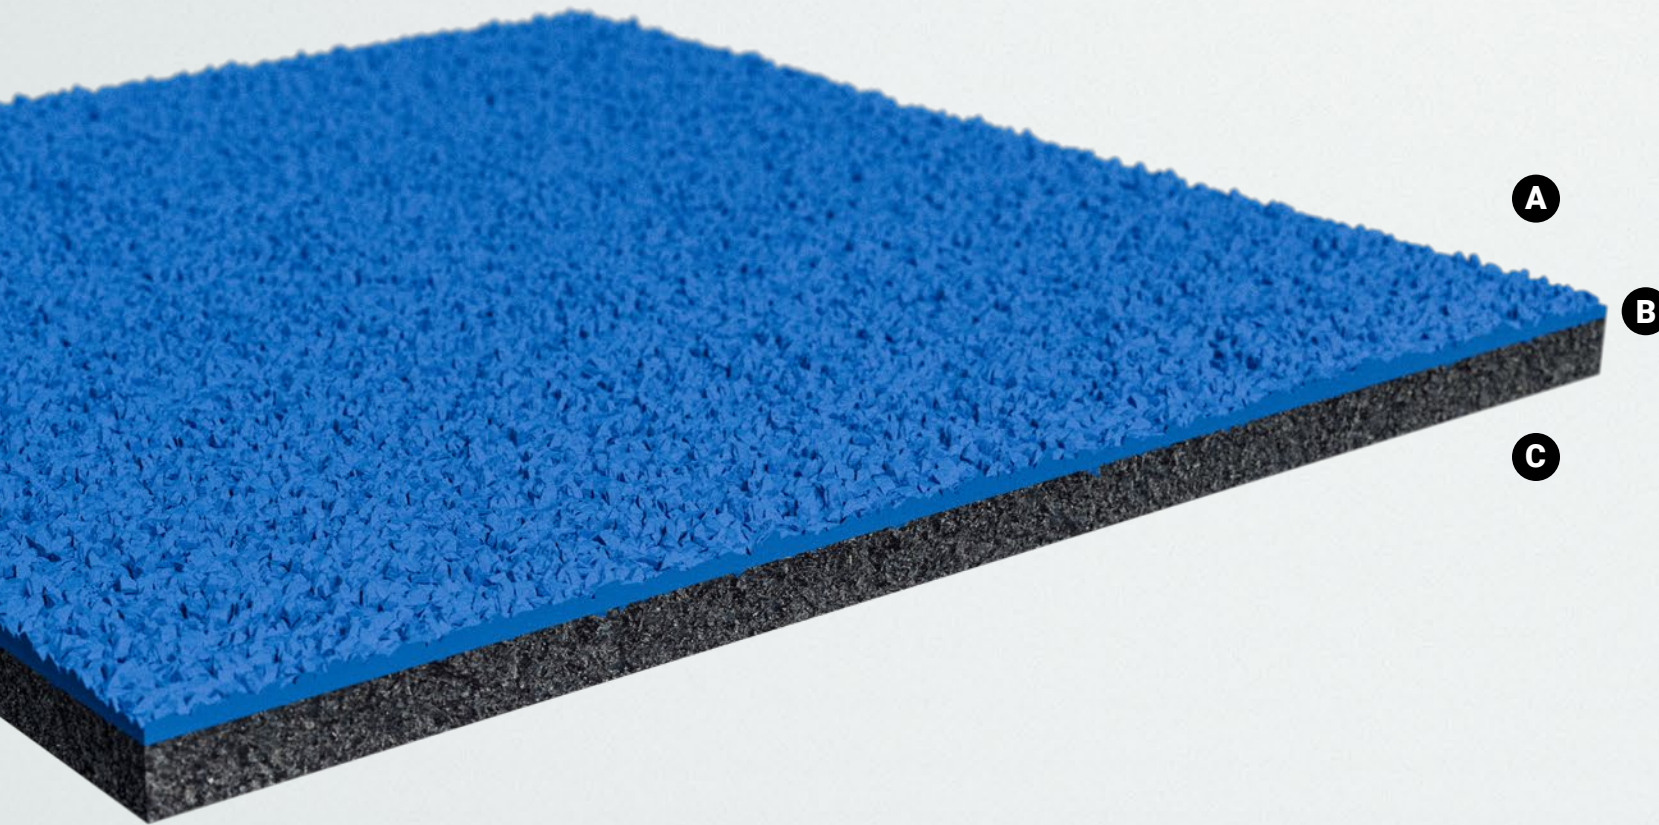

VELOCITY 3.0 SHOWN IN MODEL

PLAE

## CHARACTERISTICS

**A.** Solid-grip top layer is composed of broadcast EPDM granules, chosen for their durable slip-resistance, color retention and ease of upkeep. Unlike other track wear layers, EPDM can be spot replaced, ensuring a low-cost solution for any needed repairs.

**B.** EPDM rests in a tough elastomer bond that minimizes loose granules and adds bonus spring action, increasing athlete acceleration and maximum velocity, while bonding top layer solidly to underlayment.

**C.** Developed alongside respected strength coaches around the world, Velocity's highly aggressive Plaetech foundation layer absorbs optimal shock on impact, maintaining joint health and return of energy for an explosive launch into each stride.

## APPLICATIONS

Velocity's characteristics are highlighted in outdoor competition tracks but can also be used for indoor/outdoor training and multi-purpose areas.

## WARRANTY

PLAE warrants that Velocity, when installed using recommended procedures and adhesives, shall be free of manufacturing defects under normal use for 5 years from the date of installation. Please see Velocity's warranty for details.

# Velocity

Prefab base track

Built on our Plaetech foundation and tuned for all-out speed, Velocity cushions the foot on impact before aggressively rebounding the athlete into each subsequent stride. Velocity provides a consistent track surface across its entirety and is the perfect solution for customers who demand the absolute best.

Physical Characteristics	1.0	2.0	3.0
Top Layer:	PU Sealant	EPDM Structural Spray	Broadcast EPDM
Mid Layer:	N/A	PU Sealant	Polyurethane Binder
Energy Layer:	Plaetech Foundation	Plaetech Foundation	Plaetech Foundation
Base Layer:	Asphalt	Asphalt	Asphalt
System Thickness:	10mm	13mm	14mm
Wear Layer Thickness:	N/A	3mm	4mm
Backing Layer Thickness:	10mm	10mm	10mm



Black



Blue



Green



Red